


INSTALLATION

STEP 1

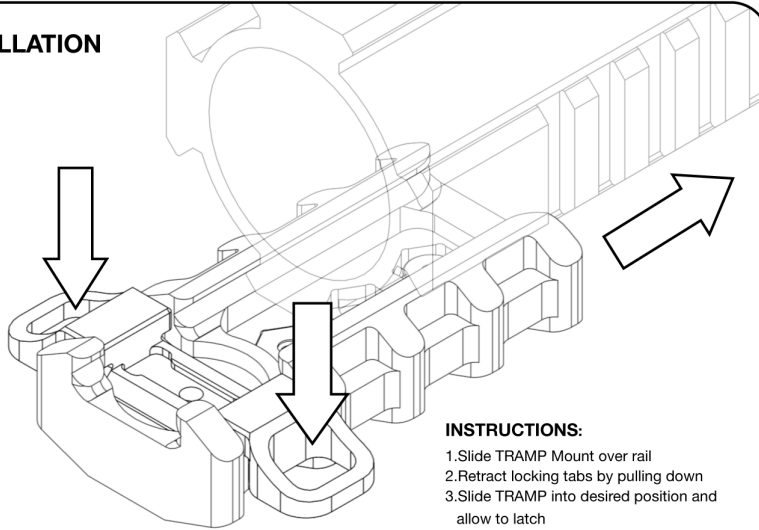


INSTRUCTIONS:

1. Slide TRAMP Mount over rail
2. Retract locking tabs by pulling down
3. Slide TRAMP into desired position and allow to latch

INSTALLATION

STEP 2

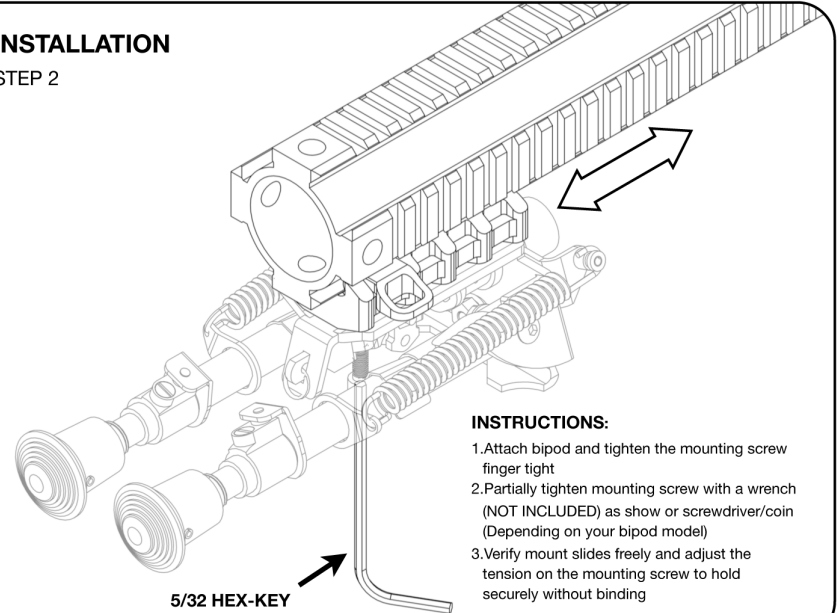


INSTRUCTIONS:

1. Attach bipod and tighten the mounting screw finger tight
2. Partially tighten mounting screw with a wrench (NOT INCLUDED) as show or screwdriver/coin (Depending on your bipod model)
3. Verify mount slides freely and adjust the tension on the mounting screw to hold securely without binding

OPERATING INSTRUCTIONS

PULL DOWN ON TABS TO:

- INSTALL
- REMOVE
- REPOSITION

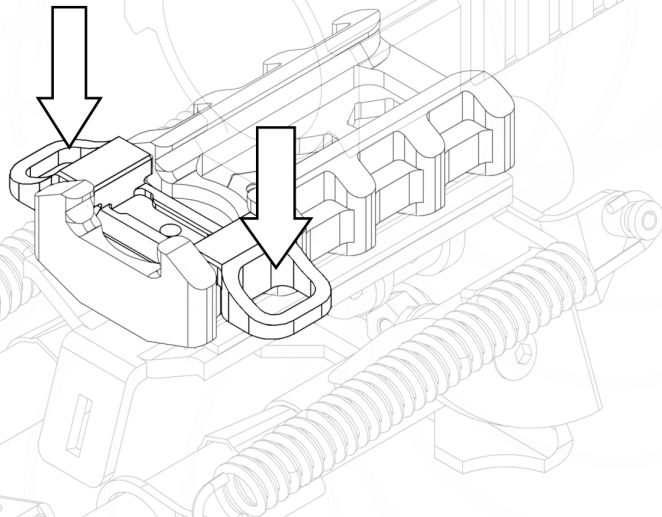

Installation and use of the The P/N 1005-249-75 TRAMP (Tactical Rapid Adjustable Mounting Point)

Bipod mount is designed to work with Harris bipods
and is designed to fit any Mil Std M1913 (Picatinny) rail.

CAUTION!

Always make certain that your Firearm is **UNLOADED** before
performing any maintenance or modification to the Firearm.



1209 Swift St N. Kansas City, MO. 64116

816 421-4956

FAX 816 421-4958

E-mail: info@badgerordnance.com www.badgerordnance.com